



Helium

1 μL Spectrophotometer

- Affordable, Reliable Quantification
 Ideal for Research and Teaching Labs
- DNA, RNA and Protein 2 - 1,600 ng/µL (dsDNA)
- Purity Ratios for Quality Control 260/230 and 260/280
- Maintenance-Free Design
 Lifetime Consistency, No Recalibration

Reliable Results, Remarkable Value


The Helium 1 μ L Spectrophotometer enables easy biomolecule quantification in under 5 seconds with as little as 1 μ L of sample. Where full UV-Vis spectral scans are not required, this device is the ideal choice for the analysis of nucleic acids and protein using absorbance measurements at 260 nm, 280 nm and 230 nm. Backed by world-renowned DeNovix reliability and support, Helium offers unparalleled value for money for both research and teaching labs.

Easy to Learn, Easy to Use

DeNovix EasyApps™ software combines simplicity with a user-friendly interface designed by life scientists, for life scientists.

Intuitive EasyApps™

- · Pre-Installed Software, No Setup Needed
- · Nucleic Acids: dsDNA, RNA, ssDNA
- · Protein: BSA, IgG, Custom Proteins
- · Data App: Easily Review and Export Results
- · Export to USB or Label Printer
- · Store up to 2,000 Samples

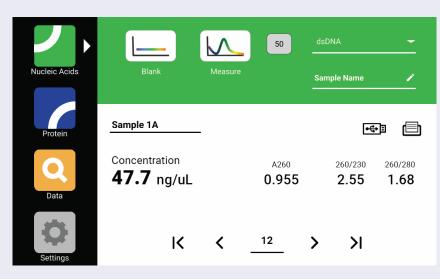



Simply Load, Measure, and Wipe Clean

Proven DeNovix Technology

Helium employs the same core DeNovix technology of the DS-11 Series, which is trusted by thousands of researchers worldwide.

Designed for sensitivity and accuracy, SmartPath™ technology combines hardware and software to provide real-time optimization of every sample, ensuring measurement confidence.







DS-Series Spectrophotometers: Quality Quantification for Every Lab



Compare All Specifications









| | DS-11 Series | DS-8X | DS-7 | Helium |
|-------------------------|------------------------------|------------------|---------------------|-----------------|
| Wavelength Range (nm) | 190 - 840 | 190 - 840 | 190 - 840 | 230, 260, 280 |
| 1 μL UV | | ⊘ x 8 | ② | |
| Spectral Scan | | ② | ② | - |
| Cuvette Option | | ② | ② | - |
| Fluorescence Option | \bigcirc | ② | - | - |
| Detection Range (dsDNA) | 0.75 - 37,500 ng/μL | 2 - 11,000 ng/μL | 2 - 15,000 ng/μL | 2 - 1,600 ng/μL |
| Data Export | Wi-Fi, Ethernet, Email, USB, | | USB / Label Printer | |

ApplicationsFull Range of UV-Vis andFull Range ofNucleic AcidFluorescence ApplicationsUV-Vis Applicationsand Proteins

Label and Network Printers

Specifications

Measurement Time
Wavelength Range
Absorbance Range
Absorbance Precision
Absorbance Accuracy
Detection Limit
Maximum Concentration
Pathlength

5 seconds 230, 260, 280 nm 0.04 - 32 AU (1 cm) 0.04 AU (1 cm) or 2%, whichever is greater 3% at 0.75 AU at 260 nm 2 ng/µL (dsDNA); 0.1 mg/mL (BSA) 1,600 ng/µL (dsDNA); 48 mg/mL (BSA) 0.5 mm (Auto Ranging to 0.04 mm) Minimum Sample Volume Contamination Detection Light Source Connectivity Display Colors Approvals Warranty 1.0 µL Purity Ratios Pulsed Xenon Flash Lamp 2 USB Ports, Label Printer 7" HD Color Touchscreen Arctic White CE, UL/CSA, FCC and Japan CAB